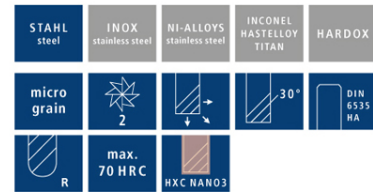



**VHM-Micro-Radiusfräser, Z=2, konischer Hals**


| Bestellnummer                         | Winkel | D1(mm) | D2(mm) | D3(mm) | D4(mm) | L1(mm) | L2(mm) | L3(mm) | R(mm) | RG |
|---------------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|-------|----|
| <a href="#">SMRK1.5-1.4/6-30-75Z2</a> | 1.4    | 1.5    | 6.0    | 1.42   | 2.82   | 75.0   | 1.35   | 30.0   | 0.75  | 2  |
| <a href="#">SMRK1.5-0.4/6-8-55Z2</a>  | 0.4    | 1.5    | 6.0    | 1.42   | 1.513  | 55.0   | 1.35   | 8.0    | 0.75  | 2  |
| <a href="#">SMRK1.5-0.4/6-10-55Z2</a> | 0.4    | 1.5    | 6.0    | 1.42   | 1.541  | 55.0   | 1.35   | 10.0   | 0.75  | 2  |
| <a href="#">SMRK1.5-0.4/6-12-55Z2</a> | 0.4    | 1.5    | 6.0    | 1.42   | 1.569  | 55.0   | 1.35   | 12.0   | 0.75  | 2  |
| <a href="#">SMRK1.5-0.9/6-15-60Z2</a> | 0.9    | 1.5    | 6.0    | 1.42   | 1.849  | 60.0   | 1.35   | 15.0   | 0.75  | 2  |
| <a href="#">SMRK1.5-0.9/6-30-75Z2</a> | 0.9    | 1.5    | 6.0    | 1.42   | 2.320  | 75.0   | 1.35   | 30.0   | 0.75  | 2  |
| <a href="#">SMRK1.5-1.4/6-20-65Z2</a> | 1.4    | 1.5    | 6.0    | 1.42   | 2.332  | 65.0   | 1.35   | 20.0   | 0.75  | 2  |
| <a href="#">SMRK1.5-1.9/6-20-65Z2</a> | 1.9    | 1.5    | 6.0    | 1.42   | 2.657  | 65.0   | 1.35   | 20.0   | 0.75  | 2  |
| <a href="#">SMRK1.5-1.9/6-30-75Z2</a> | 1.9    | 1.5    | 6.0    | 1.42   | 3.321  | 75.0   | 1.35   | 30.0   | 0.75  | 2  |
| <a href="#">SMRK2-0.4/6-8-55Z2</a>    | 0.4    | 2.0    | 6.0    | 1.92   | 2.008  | 55.0   | 1.7    | 8.0    | 1.0   | 2  |
| <a href="#">SMRK2-0.4/6-16-60Z2</a>   | 0.4    | 2.0    | 6.0    | 1.92   | 2.12   | 60.0   | 1.7    | 16.0   | 1.0   | 2  |
| <a href="#">SMRK2-0.4/6-12-55Z2</a>   | 0.4    | 2.0    | 6.0    | 1.92   | 2.064  | 55.0   | 1.7    | 12.0   | 1.0   | 2  |
| <a href="#">SMRK2-0.9/6-20-65Z2</a>   | 0.9    | 2.0    | 6.0    | 1.92   | 2.495  | 65.0   | 1.7    | 20.0   | 1.0   | 2  |
| <a href="#">SMRK2-0.9/6-25-65Z2</a>   | 0.9    | 2.0    | 6.0    | 1.92   | 2.652  | 65.0   | 1.7    | 25.0   | 1.0   | 2  |
| <a href="#">SMRK2-0.9/6-30-70Z2</a>   | 0.9    | 2.0    | 6.0    | 1.92   | 2.809  | 70.0   | 1.7    | 30.0   | 1.0   | 2  |
| <a href="#">SMRK2-1.4/6-20-65Z2</a>   | 1.4    | 2.0    | 6.0    | 1.92   | 2.814  | 65.0   | 1.7    | 20.0   | 1.0   | 2  |
| <a href="#">SMRK2-0.9/6-35-75Z2</a>   | 0.9    | 2.0    | 6.0    | 1.92   | 2.966  | 75.0   | 1.7    | 35.0   | 1.0   | 2  |
| <a href="#">SMRK2-1.4/6-25-65Z2</a>   | 1.4    | 2.0    | 6.0    | 1.92   | 3.059  | 65.0   | 1.7    | 25.0   | 1.0   | 2  |
| <a href="#">SMRK2-0.9/6-40-80Z2</a>   | 0.9    | 2.0    | 6.0    | 1.92   | 3.123  | 80.0   | 1.7    | 40.0   | 1.0   | 2  |
| <a href="#">SMRK2-0.9/6-50-90Z2</a>   | 0.9    | 2.0    | 6.0    | 1.92   | 3.438  | 90.0   | 1.7    | 50.0   | 1.0   | 2  |
| <a href="#">SMRK2-1.4/6-40-80Z2</a>   | 1.4    | 2.0    | 6.0    | 1.92   | 3.792  | 80.0   | 1.7    | 40.0   | 1.0   | 2  |
| <a href="#">SMRK2-1.9/6-40-80Z2</a>   | 1.9    | 2.0    | 6.0    | 1.92   | 4.461  | 80.0   | 1.7    | 40.0   | 1.0   | 2  |
| <a href="#">SMRK3-1.9/6-50-90Z2</a>   | 1.9    | 3.0    | 6.0    | 2.86   | 6.0    | 90.0   | 2.5    | 50.0   | 1.5   | 2  |
| <a href="#">SMRK3-0.4/6-8-55Z2</a>    | 0.4    | 3.0    | 6.0    | 2.86   | 2.937  | 55.0   | 2.5    | 8.0    | 1.5   | 2  |
| <a href="#">SMRK3-0.4/6-16-55Z2</a>   | 0.4    | 3.0    | 6.0    | 2.86   | 3.048  | 55.0   | 2.5    | 16.0   | 1.5   | 2  |
| <a href="#">SMRK3-0.4/6-20-60Z2</a>   | 0.4    | 3.0    | 6.0    | 2.86   | 3.104  | 60.0   | 2.5    | 20.0   | 1.5   | 2  |
| <a href="#">SMRK3-0.9/6-30-70Z2</a>   | 0.9    | 3.0    | 6.0    | 2.86   | 3.724  | 70.0   | 2.5    | 30.0   | 1.5   | 2  |
| <a href="#">SMRK3-0.9/6-40-80Z2</a>   | 0.9    | 3.0    | 6.0    | 2.86   | 4.038  | 80.0   | 2.5    | 40.0   | 1.5   | 2  |
| <a href="#">SMRK3-0.9/6-50-90Z2</a>   | 0.9    | 3.0    | 6.0    | 2.86   | 4.352  | 90.0   | 2.5    | 50.0   | 1.5   | 2  |
| <a href="#">SMRK3-0.9/6-60-100Z2</a>  | 0.9    | 3.0    | 6.0    | 2.86   | 4.667  | 100.0  | 2.5    | 60.0   | 1.5   | 2  |