


VHM-Schaftfräser, Z=5-8

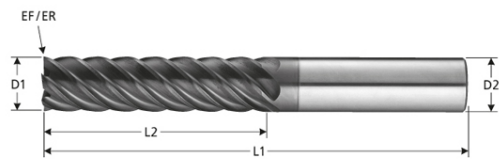

STAHL steel	VA-STAHl stainless steel	GG(G) cast iron	TITAN titanium	KUPFER copper
ALU aluminium	UNIVERSAL all-purpose			
micro grain	5 - 8			DIN 6535 HA
ER	EF	max. 48 HRC	X-CEED	

Bestellnummer	D1(mm)	D2(mm)	L1(mm)	L2(mm)	EF(mm)	ER(mm)	Beschichtung	Z	RG
SSLF25-2.5/25-45-121Z8	25.0	25.0	121.0	45.0	-	2.5	X-CEED	8	2
SSLF25/25-92-180Z8	25.0	25.0	180.0	92.0	0.20	-	X-CEED	8	2
SSLF25-2.5/25-92-180Z8	25.0	25.0	180.0	92.0	-	2.5	X-CEED	8	2